

## A5s


# RECEIVING CARD NOVASTAR A5S

The A5s is a high-end small receiving card developed by Novastar.

A single A5s loads up 320x256 pixels. Supporting the pixel level brightness and chroma calibration, individual gamma adjustment for RGB, and 3D functions, the A5s can significantly improve the display effect and user experience.

The A5s uses high-density connectors for communication to limit the effects of dust and vibration, resulting in high stability. It supports up to 32 groups of parallel RGB data or 64 groups of serial data (expandable to 128 groups of serial data). Its reserved pins allow for custom functions of users.

Thanks to its EMC Class B compliant hardware design, the A5s has improved electromagnetic compatibility and is suitable for various on-site setups.

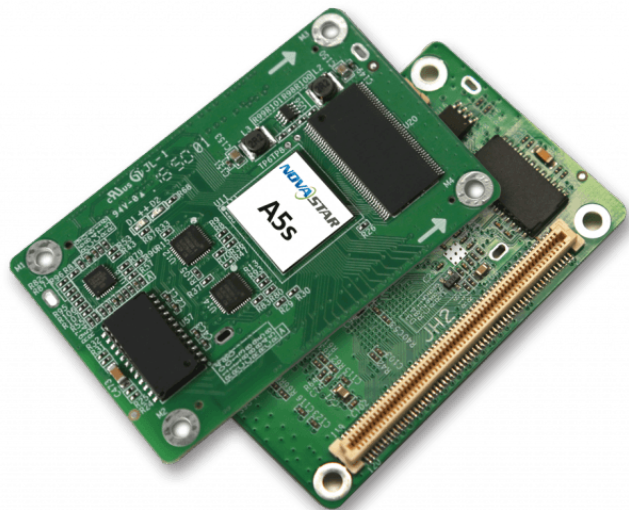

A5s

# RECEIVING CARD NOVASTAR A5S

## PRODUCT DETAILS

### KEY FEATURES

Pixel level brightness and chroma calibration

Immediate adjustment of dark and bright lines caused by splicing of modules or cabinets

3D image output support

Individual RGB gamma adjustment for a more realistic image

Image rotation in 90° increments

Smart module support and automatic module calibration for improved efficiency

Flash Module management for modules with flash memory

Mapping function

Temperature and voltage monitoring without the use of peripherals

Bit error detection to troubleshoot network communication problems

Low-voltage differential signaling (LVDS) Transmission

Dual card backup and Loop backup for high reliability

### SPECIFICATIONS

<b>Maximum Loading Capacity</b>	320x256 pixels
<b>Input Voltage</b>	DC 3.3V to 5.5V
<b>Rated Current</b>	0.5A
<b>Rated Power Consumption</b>	2.5W
<b>Working Temperature</b>	-20°C to +70°C
<b>Working humidity</b>	10% RH to 90% RH, non condensing
<b>Product Size</b>	70 x 45 x 8 mm (2.75 x 1.77 x 0.31 in)

A5s

# RECEIVING CARD NOVASTAR A5S

---

**Product Weight**

17.3 g (0,04 lbs.)